

SOKKIA

DT240 DT540/DT740/DT940 DT540L/DT740L/DT940L Digital Theodolite

The Richest Lineup Ensuring Maximum Job Efficiency at Unparalleled Performance Levels

■ Common Features for All Models

- 2.5" – unsurpassed telescope resolving power*
- IP66 – industry's highest dust/water protection
- Absolute encoders
- Lightweight
- Standard LR6/AA batteries
- Up to 170 hours of operating time

*Except for DT940(L).

■ Exclusive Features for the Laser Models

- 200m (660ft.) – long-range laser pointer
- 0.4mm@10m – ultra-small beam spot

■ Superior Performance and Durability

The Sokkia DT series theodolites feature superior optics, mechanics, advanced absolute encoder systems, and proven automatic compensators. In addition to these essential technologies for angle measurement instruments, the Sokkia DT series boasts the industry's highest IP66 dust and water protection capability to withstand the harshest worksite environments.



■ Power-Saving Technology to Save Battery Costs

Four LR6/AA alkaline batteries provide extra-long operating time from 100 to 170 hours, saving costs for replacement batteries. The DT instruments operate for two to five weeks without changing batteries*.

* When used for seven hours a day, five days a week, excluding the use of laser pointers.

■ Laser Pointer to Increase Construction Work Efficiency (Laser models)

The DT laser models feature built-in coaxial laser pointers that maximize construction work efficiency. The applications include:

- Layout/Setting-Out
- Horizontal/Vertical Alignment
- Leveling
- Grading
- Squaring






■ Long-Range Laser with Ultra-Small Beam Spot (Laser models)

The laser beam reaches 200m (660ft.) under indoor or underground conditions. Even under daylight conditions, the beam spot can be recognized at up to 50m (164ft.) away from the instrument. Red laser beam emitted from the objective lens is focused simultaneously with the telescope, meaning that the beam spot size becomes the minimum where you focus.

● Beam Spot Size (when focused)

	Distance	5m (16ft.)	10m (33ft.)	20m (66ft.)	30m (98ft.)	50m (164ft.)
DT540L/740L	Beam Diameter (mm)	0.1x0.2	0.2x0.4	0.5x0.7	0.7x1.1	1.2x1.9
DT940L	Beam Diameter (mm)	0.1x0.2	0.3x0.4	0.6x0.8	0.8x1.2	1.4x2.0

The laser beam sizes are theoretical values. The visible laser beam size will vary with ambient brightness.

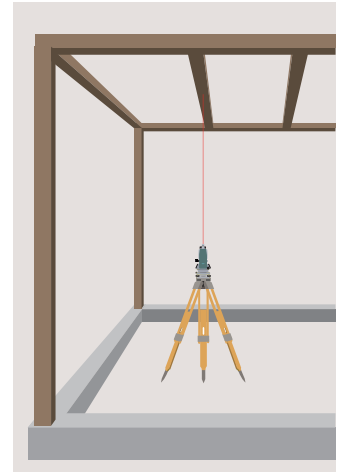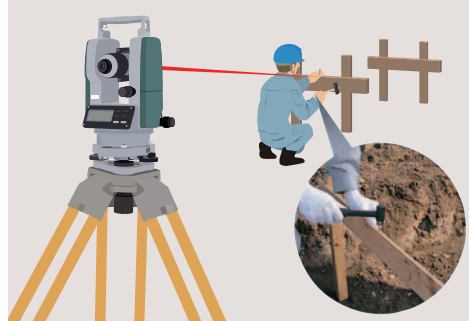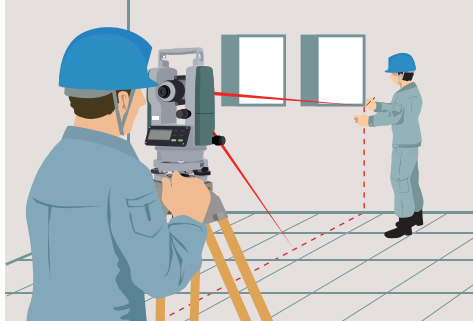

■ SPECIFICATIONS

Model	Digital Theodolite				Laser Digital Theodolite				
	DT240	DT540	DT740	DT940	DT540L	DT740L	DT940L		
Laser pointer									
Type					Coaxial laser pointer with beam focusing capability				
Laser specifications					Class 2, Wavelength: 633nm, Maximum output: 0.6mW				
Laser range	Daylight					50m (164ft.)			
	Indoor (700 lux)					200m (656ft.)			
Telescope									
Length	149mm (5.9in.)				152mm (6.0in.)				
Objective aperture	45mm (1.8in.)			40mm (1.6in.)	45mm (1.8in.)		40mm (1.6in.)		
Magnification	30x			26x	30x		26x		
Resolving power	2.5"			3"	2.5"		3"		
Image / Field of view	Erect / 1°30' (26m/1,000m)								
Minimum focus	0.9m (3.0ft.)				1m (3.3ft.)				
Stadia	Multiplication constant: 100, Additive constant: 0								
Reticle illumination	Y	Y	Y	-	Y	Y	-		
Angle measurement									
Method	Absolute rotary encoder scanning								
Detecting	Horizontal	Diametrical			Single	Diametrical		Single	
	Vertical	Diametrical			Single			Single	
Display resolutions	1" / 5" 0.2 / 1mgon		5" / 10" 1 / 2mgon		10" / 20" 2 / 5mgon		1" / 5" 0.2 / 1mgon	5" / 10" 1 / 2mgon	10" / 20" 2 / 5mgon
Accuracy	2"		5"		9"		5"		7"
Circle diameter	71mm (2.8in.)								
Automatic compensation range	±3'(±55mgon)			-		±3'(±55mgon)		-	
General									
Control panel layout	On both faces			On single face		On both faces		On single face	
Display	LCD, 7 digits x 2 lines, backlight								
Interface	RS-232C			-		RS-232C		-	
Optical plummet	Magnification: 3x, Field of view: 3°, Minimum focus: 0.5m (1.64ft.)								
Sensitivity of levels	Plate level	30"/2mm	40"/2mm		60"/2mm		40"/2mm		60"/2mm
	Circular level	10"/2mm							
Tribrach	Detachable			Fixed		Detachable		Fixed	
Operating temperature	-20 to +50°C (-4 to +122°F)								
Dust and Water Protection	IP66 (IEC 60529:2001)								
Size (w/handle)	W188 x D149 x H313mm (W7.4 x D5.9 x H12.3in.)			W188 x D149 x H305mm (W7.4 x D5.9 x H12.0in.)		W188 x D152 x H313mm (W7.4 x D6.0 x H12.3in.)		W188 x D152 x H305mm (W7.4 x D6.0 x H12.0in.)	
Weight (w/batteries)	4.1kg (9.0 lb.)			3.5kg (7.7 lb.)		4.2kg (9.3 lb.)		3.6kg (7.9 lb.)	
Power supply									
Battery	LR6/AA batteries x 4								
Operating time w/alkaline batteries at 20°C (68°F)	Theodolite only	Approx.100 hrs	Approx.140 hrs	Approx.150 hrs	Approx.170 hrs	Approx.140 hrs	Approx.150 hrs	Approx.170 hrs	
	Laser only	-					Approx.80 hrs		
	Theodolite and laser	-					Approx.45 hrs		

■ Standard accessories

- LR6/AA batteries (x4) • Lens cap • Plumb bob • Tool kit • Operator's manual • Carrying case and shoulder strap

- Windows® is a registered trademark of Microsoft Corporation in the United States and other countries.
 - Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
 - Other trademarks and trade names are those of their respective owners.
 - Designs and specifications are subject to change without notice.
 - Product colors in this brochure may vary slightly from those of the actual products owing to limitations of the printing process.



TOPCON CORPORATION

75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, Japan
 Phone: (+81)3-3558-2993 Fax: (+81)3-3960-4214
 www.topcon.co.jp

Your local Authorized Dealer is:

Specifications subject to change without notice

©2015 Topcon Corporation All rights reserved.